



Goal Zero - AC power bank

Sherpa 100AC

SHERPA 100AC

Sleek and powerful, the Sherpa 100AC is your go-to source for versatile power while on the move. Airline approved and travel ready, the 94.72Wh power bank is equipped with innovative features like wireless charging, high-speed Power Delivery, and a variety of ports to power phones, tablets, DSLR cameras, and laptops—including power-hungry MacBooks.

Two High-Speed Power Delivery Ports

At 60W each, these USB-C Power Delivery ports provide rapid power for laptops, phones, and more.

Integrated 100W AC

Take the outlet with you, on the plane or in the wild, for serious power anywhere you need it. Perfect for keeping cameras and laptops charged.

Qi Wireless Charging + 2.4A USB



No matter the phone, there's a wicked fast, convenient charging solution designed for you. Charge your iPhone and use your headphones at the same time on long flights using Qi wireless charging.

Interactive OLED Display

Check power in and power out, get detailed port information, and even set roles for ports.

Four Rugged Cables Included

The cables you need to get the job done are included, and an incredibly easy way to store them for later. Includes Lightning, Micro USB, USB-C, and USB-C to USB-C.

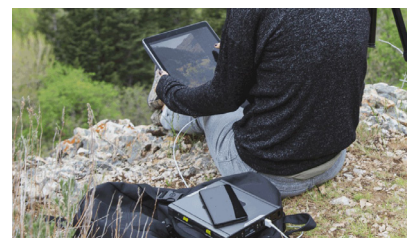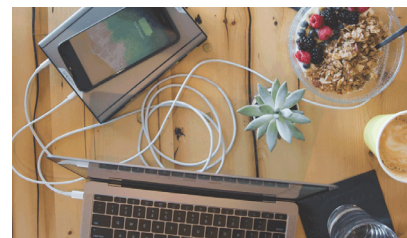

Contact Danimex for more information or visit www.danimex.com/goal-zero

DMX-2020-05

Technical Specifications



SHERPA 100AC	
CHARGE TIMES	<ul style="list-style-type: none"> • USB-C PD (60W): 2.5 hrs • Wall Charger (45W): 3 hrs • USB-A (2.4A): 9 hrs • Nomad 14: 12-28 hrs • Nomad 28: 6-14 hrs • Boulder 50: 4-8 hrs
PORTS	<ul style="list-style-type: none"> • Wireless Qi (output): 5W max • USB-A: 5V, up to 2.4A (12W max), regulated • USB-C PD ports (input/output): 5V, 9V, 12V, 15V, 20V up to 3A (60W max), regulated • AC inverter (output): 110V, up to 0.9A (100W max), 60Hz, modified sine wave • Charging port (input, 8mm): 14-22V (50W max)
BATTERY DETAILS	<ul style="list-style-type: none"> • Cell chemistry: Li-ion • Pack Capacity: 94.7Wh (14.8V, 6400mAh) • Single Cell Equivalent Capacity: 25600mAh @ 3.7V • Shelf-life: Charge every 3-6 months • Management system: Charging and low-battery protection built-in
GENERAL	<ul style="list-style-type: none"> • Product SKU: 22051 • Weight: 2.0 lbs (0.9 kg) • Dimensions: 7.5 x 1.0 x 5.68 in (19.0 x 2.54 x 14.4 cm) • Operating usage temp: 32-104F (0-40C) • Certifications: CE FCC RoHS • Warranty: 12 months
WHAT CAN THE SHERPA 100AC POWER?	<p>The Sherpa 100AC is great for all your laptops, tablets, or multiple USB powered devices.</p> <ul style="list-style-type: none"> • POV Camera 18 Recharges • Smartphone 8 Recharges • Tablet 4 Recharges • Laptop 2 Recharges
THREE WAYS TO CHARGE THE SHERPA 100AC	<ul style="list-style-type: none"> • Recharge from the sun by connecting a compatible solar panel. Charge time is dependent on the size of the solar panel. The Nomad 28 Plus will fully recharge the Sherpa 100AC in about 7-14 hours. • Use included cables to recharge from a USB source in 8 - 10 hours. Fully recharges from the wall in about 3 hours using the Sherpa Power Supply accessory (not included). • Recharge from your car 12V adapter in about 3-5 hours.

